


Lithium ion Battery

Drawing:

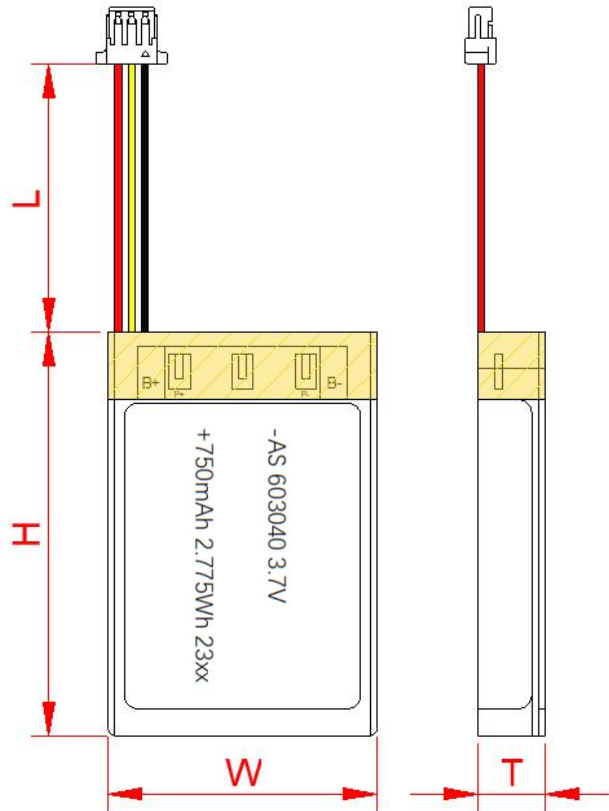

Item 项目		Rating 参数	Note 标注
1.1 Capacity 容量	Typical 标称容量	750 mAh	Temperature/温度: 25±5°C
	Minimum 最小容量	720 mAh	Charge/充电: 0.2C Discharge/放电: 0.2C
1.2 Nominal Voltage 标称电压		Average 3.7V	
1.3 AC Impedance Resistance 内阻		≤70mΩ	Cell
		≤700mΩ	Battery Pack
1.4 Discharge Cut-off Voltage 放电截止电压		3.0V	
1.5 Charge voltage 充电限制电压		4.2V	Cut-off current≤7.5mA
1.6 Max Charge Continuous 最大充电电流		750mA	+10~+45°C
1.7 Max Discharge Continuous 最大连续放电		750mA	+10~+45°C
1.8 Weight / 重量		Approx 15.5g	
1.9 Cycle Life 循环寿命		500 cycles	Capacity ≥80%
1.10 Shipping Voltage / 出厂电压		3.85-3.95V	
1.11 Operating Temperature 工作温度	Charge 充电	0~+45°C	Max Charge:150mA
	Discharge 放电	+10~+45°C	Max Charge:750mA
		-20~+60°C	

Model Name/型号: AS 603040

Battery size (T*W*H): 6.2*30.5*42.5mm	Wire (L): 50±3mm (UL3302 30#)	Connector: SUHR-03V-S-B
---------------------------------------	-------------------------------	-------------------------

Overcharge detection voltage 过充电检测电压:	4.255--4.305V
---------------------------------------	---------------

Overdischarge detection voltage 过放电检测电压:	2.950--3.050V
--	---------------

Overcurrent protection current 过电流保护电流:	1~3.0A
---	--------

NTC: 10K,B=3435±1%	PTC: MF-USMF075
--------------------	-----------------

IC: DAA
