


Lithium ion Battery

Drawing:

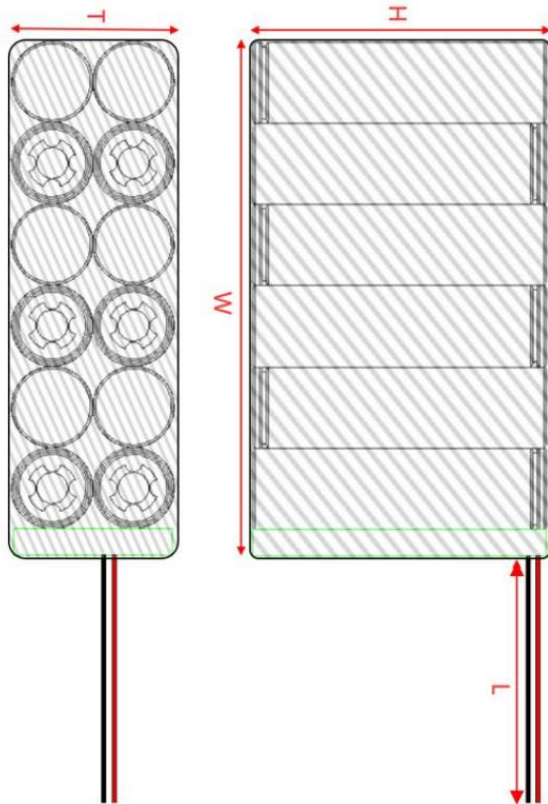

Item 项目		Rating 参数	Note 标注
1.1 Capacity 容量	Typical 标称容量	4000 mAh	Temperature/温度: 25±5°C
	Minimum 最小容量	3800 mAh	Charge/充电: 0.2C Discharge/放电: 0.2C
1.2 Nominal Voltage 标称电压		Average 22.2V	
1.3 AC Impedance Resistance 内阻		≤50mΩ	Cell
		≤360mΩ	Battery Pack
1.4 Discharge Cut-off Voltage 放电截止电压		18.0V	
1.5 Charge voltage 充电限制电压		25.2V	Cut-off current≤40mA
1.6 Max Charge Continuous 最大充电电流		4000mA	+10~+45°C
1.7 Max Discharge Continuous 最大连续放电		4000mA	+10~+45°C
1.8 Weight / 重量		Approx 500.0g	
1.9 Cycle Life 循环寿命		300 cycles	Capacity ≥80%
1.10 Shipping Voltage / 出厂电压		21.0~22.0V	
1.11 Operating Temperature 工作温度	Charge 充电	0~+45°C	Max Charge:800mA
	Discharge 放电	+10~+45°C	Max Charge:4000mA
		-20~+60°C	

Model Name/型号: A&S 18650-22.2V-4Ah

Battery size (T*W*H) : 67*95.5*153mm	Wire (L) : 80±5mm (UL3135 16#)	Connector: XT60-F
Overcharge detection voltage 过充电检测电压: 4.225--4.275V		
Overdischarge detection voltage 过放电检测电压: 2.650--2.750V		
Overcurrent protection current 过电流保护电流: 30~40.0A		
NTC: //		
IC: CW1073-AAAS		