


Lithium ion Battery

Drawing:

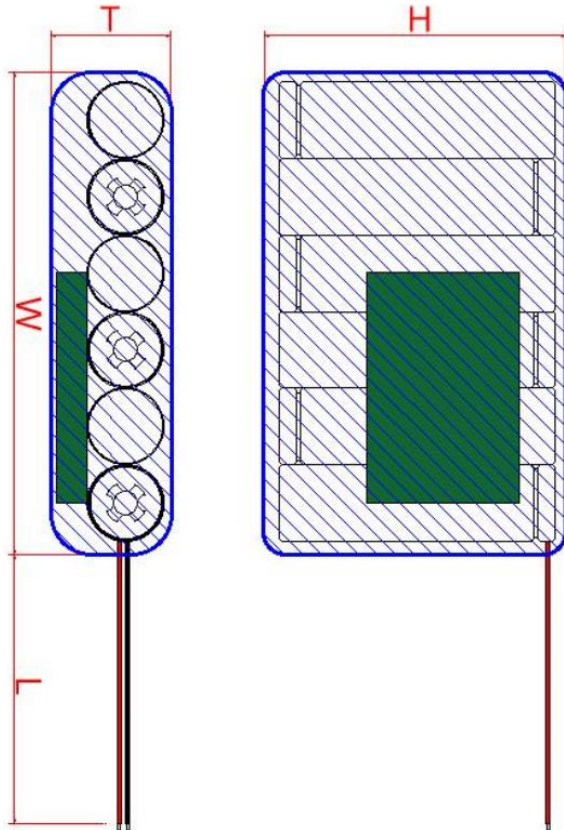

Item 项目		Rating 参数	Note 标注
1.1 Capacity 容量	Typical 标称容量	2500 mAh	Temperature/温度: 25±5℃
	Minimum 最小容量	2400 mAh	Charge/充电: 0.2C Discharge/放电: 0.2C
1.2 Nominal Voltage 标称电压		Average 22.2V	
1.3 AC Impedance Resistance 内阻		≤50mΩ	Cell
		≤360mΩ	Battery Pack
1.4 Discharge Cut-off Voltage 放电截止电压		18.0V	
1.5 Charge voltage 充电限制电压		25.2V	Cut-off current≤25mA
1.6 Max Charge Continuous 最大充电电流		2500mA	+10~+45℃
1.7 Max Discharge Continuous 最大连续放电		12A	+10~+45℃
1.8 Weight / 重量		Approx 500.0g	
1.9 Cycle Life 循环寿命		300 cycles	Capacity ≥80%
1.10 Shipping Voltage / 出厂电压		21.0~22.0V	
1.11 Operating Temperature 工作温度	Charge 充电	0~+45℃	Max Charge:500mA
		+10~+45℃	Max Charge:2500mA
	Discharge 放电	-20~+60℃	

Model Name/型号: A&S 18650

Battery size (T*W*H) : 31*72*112mm	Wire (L) : 80±5mm (UL3239 16#)	Connector: //
Overcharge detection voltage 过充电检测电压: 4.225--4.275V		
Overdischarge detection voltage 过放电检测电压: 2.650--2.750V		
Overcurrent protection current 过电流保护电流: 20~40.0A		
NTC:		
IC: CW1073-AAAS		